

FLIR FC-Series ITS

Thermal imaging cameras for traffic monitoring



FLIR thermal imaging cameras are commonly integrated in traffic video detection and monitoring solutions. Needing no light at all to produce an image, they can be used for a wide variety of traffic applications.

HIGH IMAGE QUALITY

The FLIR FC-Series ITS cameras are equipped with a maintenance-free uncooled microbolometer detector that produces accurate images on which the smallest detail can be seen.

DIFFERENT LENS OPTIONS

FLIR offers the FC-Series ITS with various lens options. They are available with a 9 mm, 13 mm or 19 mm lens. Longer lenses offer a narrower field of view so that you can see farther.

EASY TO INSTALL

All FLIR FC-Series ITS thermal imaging cameras can be installed on existing infrastructure.

DESIGNED FOR USE IN HARSH ENVIRONMENTS

The FC-Series ITS cameras are extremely rugged systems. Their vital core is well protected, meeting IP66 requirements, against dust and water ingress. They operate between -50°C and +75°C. Perfect for all climates.


VIDEO ANALYTICS

Just like all thermal imaging cameras, the FLIR FC series T works perfectly in combination with video analytics.

KEY FEATURES

FC-SERIES ITS CAMERAS:

- NEED NO LIGHT TO OPERATE
- SEE IN TOTAL DARKNESS IN PRACTICALLY ALL WEATHER CONDITIONS
- CAN BE USED IN DAYLIGHT AS WELL
- ELIMINATE PROBLEMS WHICH VISIBLE CAMERA DETECTION SYSTEMS ARE FACED WITH SUCH AS MISSED OR FALSE CALLS
- SERVE AS A SIMPLE PLUG AND PLAY REPLACEMENT FOR EXISTING DAYLIGHT CAMERAS
- ARE EXTREMELY AFFORDABLE AND EASY-TO-USE
- HYBRID IP AND ANALOG VIDEO OUT

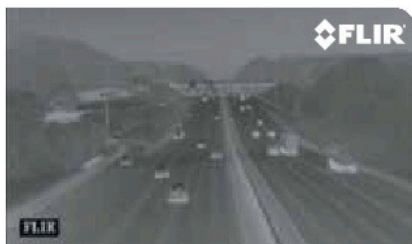

Traffic monitoring



Automatic Incident Detection



FC-Series ITS: version specific specifications

Sensor resolution	320 x 240	640 x 480
Name/Focal length/ Field of view	FC-363 ITS: 7.5 mm lens – FOV : 63° (H) x 50° (V) FC-348 ITS: 9 mm lens – FOV : 48° (H) x 39° (V) FC-334 ITS: 13 mm lens – FOV : 34° (H) x 28° (V) FC-324 ITS: 19 mm lens – FOV : 24° (H) x 19° (V) FC-313 ITS: 35 mm lens – FOV : 13° (H) x 10° (V) FC-309 ITS: 35 mm lens – FOV : 9° (H) x 7° (V)	FC-690 ITS: 7.5 mm lens – FOV : 90° (H) x 69° (V) FC-669 ITS: 9 mm lens – FOV : 69° (H) x 56° (V) FC-645 ITS: 13 mm lens – FOV : 45° (H) x 37° (V) FC-632 ITS: 19 mm lens – FOV : 32° (H) x 26° (V) FC-618 ITS: 35 mm lens – FOV : 18° (H) x 14° (V)
Electronic zoom	up to 4x continuous	up to 4x continuous

Imaging Specifications

System Overview	FLIR FC-Series ITS
Imaging performance	24.6 mm (0.97 in.)
Detector type	Focal Plane Array (FPA), uncooled Vanadium Oxide (Vox) microbolometer
Spectral range	7.5 to 13.5µm
Thermal sensitivity	<50 mK f/1.0
Image frequency	NTSC: 30Hz or 7.5Hz PAL: 25Hz or 8.33Hz
Focus	Focus free, athermal lens
Image processing	Automatic Gain Control (AGC), Digital Detail Enhancement (DDE)
System features	
Automatic heater	Clears ice from windows Automatic deicing, tested according to MIL-STD-810F Method 521.1
Image presentation	
Video output	PAL or NTSC, hybrid IP and analog
Video over Ethernet	Two independent channels of streaming MPEG-4, H.264, or M-JPEG
Streaming Resolutions	D1: 720x576, 4CIF: 704x576, Native: 640x512, Q-Native: 320x256, CIF: 352x288, QCIF: 176x144
Thermal AGC Modes	Auto AGC, Manual AGC, Plateau Equalization AGC, Linear AGC, Auto Dynamic Detail Enhancement (DDE), Max Gain Setting
Thermal AGC Region of Interest (ROI)	Default, Presets and User definable to insure optimal image quality on subjects of interest
Image Uniformity Optimization	Automatic Flat Field Correction (FFC) - Thermal and Temporal Triggers
Power*	
Requirements	Power over Ethernet PoE IEEE 802.3af-2003 or PoE+ (IEEE 802.3at-2009 standard) 12-38 VAC 11-56 VDC
Consumption	5 W nominal at 24 VDC 8 VA nominal at 24 VAC 21 W peak at 24VDC, with heaters 29VA peak at 24VAC, with heaters
Environmental specifications	
Operating temperature range	-50°C to +70°C (Cold start: -40°C to +70°C)
Storage temperature range	-55°C to +85°C
Encapsulation	IP66 + IP 67 (IEC 60529)
Shock	Mil-Std-810F
Vibration	IEC 60068-2-27
Physical characteristics	
Camera Weight	1.8 kg without sunshield 2.2 kg with sun shield
Camera Size (L x W x H)	259 mm x 114 mm x 106 mm without sunshield 282 mm x 129 mm x 115 mm with sun shield
Shipping weight (camera + packaging)	2.8 kg
Shipping size (camera + packaging) (L x W x H)	366 mm x 188 mm x 178 mm

Interfaces	
TCP/IP	Yes
Network	
Supported Protocols	IPv4, HTTP, Bonjour, UPnP, DNS, NTP, RTSP, RTCP, RTP, TCP, UDP, ICMP, IGMP, DHCP, ARP, SCP
Network Application Programming Interfaces (APIs)	Nexus SDK for comprehensive system control and integration Nexus CGI for http command interfaces ONVIF 2.0 Profile S
Approvals	
EN55022:2010, Class A	
EN 61000-3-3: 2008	
EN 61000-3-2: 2006+A1: 2009 & A2 2009	
EN55024:2010	
EN51030-4: 2011	
FCC Part 15, Subpart B, Class A	
IP 66 + IP 67 (IEC 60529)	
IEC 60068-2-27	
Standard package	
Thermal imaging camera, sun shield, operator manual, FLIR Sensors Manager single sensor CD	

PORTLAND
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

BELGIUM
FLIR Systems Trading
Belgium BVBA
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

UK
FLIR Systems UK
2 Kings Hill Avenue
Kings Hill
West Malling - Kent
ME19 4AQ
United Kingdom
PH: +44 (0)1732 220 011

SANTA BARBARA
FLIR Systems, Inc.
70 Castilian Drive.
Goleta, CA 93117
USA
PH: +1 866.477.3687

FLIR ITS
Hospitaalweg 1B
B-8510 Marke
Belgium
PH: +32 (0)56 37 22 00

www.flir.com
NASDAQ: FLIR

Specifications are subject to change without notice
©Copyright 2014, FLIR Systems, Inc. All other brand and product names are trademarks of their respective owners. The images displayed may not be representative of the actual resolution of the camera shown. Images for illustrative purposes only. [Created 10/14]

www.flir.com



代理店
株式会社アイ・アール・システム

〒206-0041 東京都多摩市愛宕4-6-20 HP: <http://www.irsystem.com>
TEL: 042-400-0373 FAX: 042-400-0374 メール: office@irsystem.com



The World's Sixth Sense™