

Lms27LED-CG




Device parameters	Symbol	Value	Units
Operating/storage temperature	T_{opr}	0..+50	$^{\circ}\text{C}$
Soldering temperature (time < 3 seconds, 3 mm from case)	T_{sol}	+180	$^{\circ}\text{C}$


All parameters are for LED operation at 25 $^{\circ}\text{C}$ unless otherwise stated.

LED parameters	Conditions	Symbol	Value	Units
Peak emission wavelength ¹	qCW mode ³ I = 150 mA	λ_p	2.70 - 2.79	μm
FWHM of the emission band ¹	qCW mode ³ I = 150 mA	FWHM	300 - 500	nm
Average optical power (minimal / typical) ¹	qCW mode ³ I = 200 mA	P_{qCW}	min 50 / typ 150	μW
Peak optical power (minimal / typical) ²	Pulse mode ⁴ I = 1 A	P_{pul}	min 370 / typ 1000	μW
Maximum operating current	qCW mode ³	$I_{max\ qCW}$	200	mA
	Pulse mode ⁴	$I_{max\ pulse}$	1	A
Forward voltage ¹	qCW mode ³ I = 200 mA	V	0.2 - 1.0	V


Typical spectrum (qCW³)

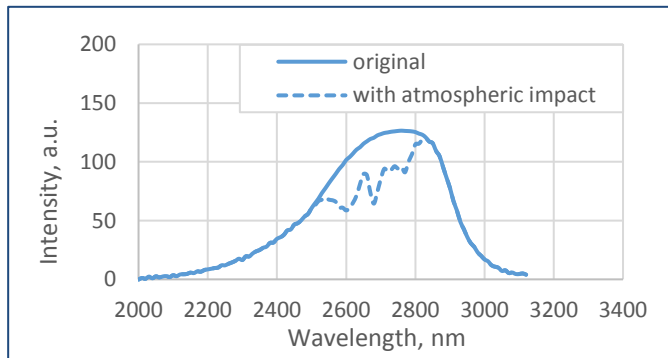

Typical optical power characteristic (qCW³)

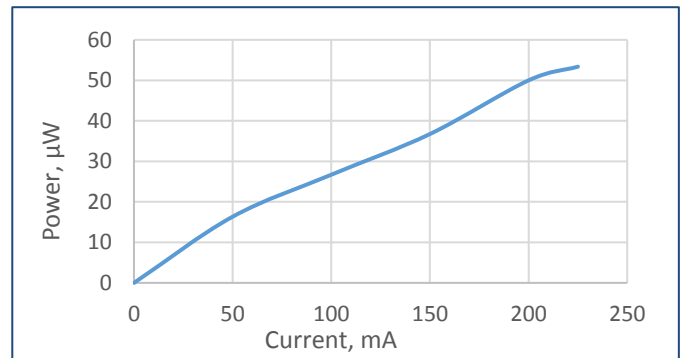

Typical current-voltage characteristic (qCW³)

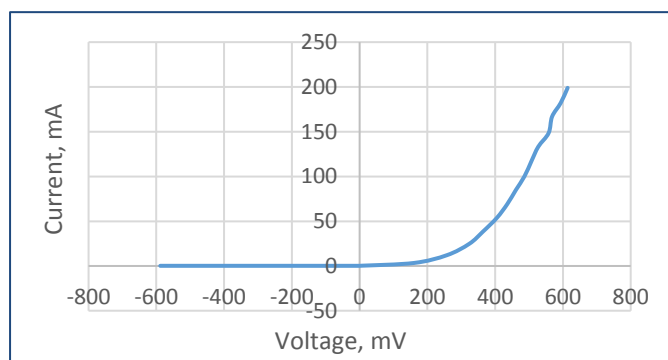

¹ Parameter tested for each device.

² Parameter tested for representative sampling.


³ qCW mode: repetition rate: 0.5 KHz, pulse duration: 1 ms, duty cycle: 50%.

⁴ Pulse mode: repetition rate: 0.5 KHz, pulse duration: 20 μs , duty cycle: 1%.

Packages	Model
TO-18 with glass cover	Lms27LED-CG

Radiant characteristic (far-field pattern)


TO-18 package with glass cover

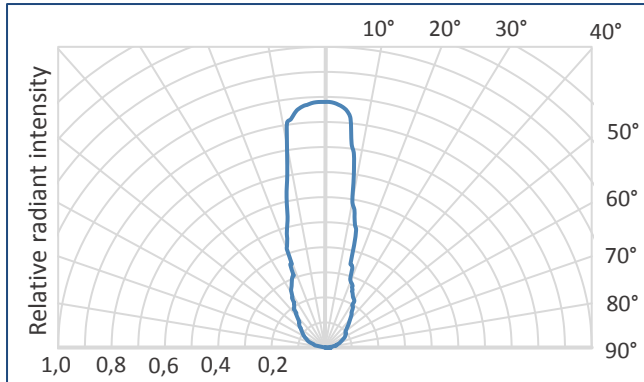

Related products:


- **Photodiodes Lms36PD series** - detectors of mid-infrared radiation;
- **LED drivers (D-41i, D-51i, minidrivers mD-1c, mD-1p)** - provide LED power supply in pulse modes.

To drive the LED we recommend the following basic circuit connection:

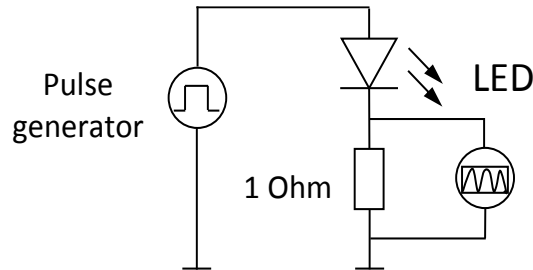


We recommend using **Quasi Continuous Wave (qCW) mode** with a duty cycle 50% or 25% to obtain maximum average optical power and short **Pulse modes** to obtain maximum peak power. Hard CW (continuous wave) mode is NOT recommended.

Quasi Continuous Wave (qCW) mode

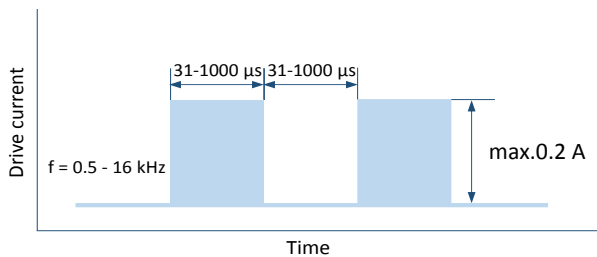

Pulse mode

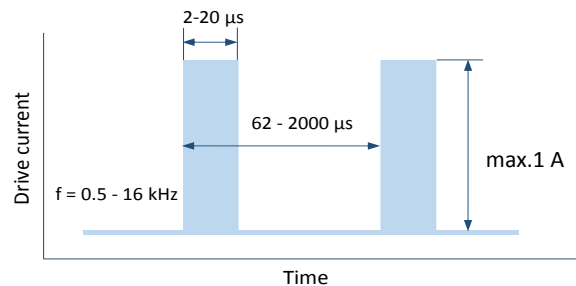

IMPORTANT CAUTIONS:

- please check your connection circuit before turning on the LED;
- please mind the LED polarity: anode is marked with a RED dot; REVERSE voltage applying is FORBIDDEN;
- please do not connect the LED to the multimeter;
- please control the CURRENT applied to the LED in order NOT to EXCEED the maximum allowable values;
- please do not touch glass covering and do not apply any force to it;
- please observe the operating and storage temperature, exceeding the allowable range may cause irreparable damage of glass covering.

