

# MicroSENS Hightemp IR carbon dioxide sensor

Micro-Hybrid gas sensor for reliable and accurate CO<sub>2</sub> measurement in incubators




This IR CO<sub>2</sub> sensor has been specially optimized for the measurement of 5 Vol-% CO<sub>2</sub> in cell incubators to manage ideal cell and tissue growth.

The sensor can be placed directly in the incubation chamber to measure the exact cell experienced environment. It determines the CO<sub>2</sub> concentration based on its characteristic infrared absorption.

## ADVANTAGES

- IR dual beam technology
- Temperature and pressure compensated
- Heat-sterilizable up to 190° C
- Long lifetime
- Humidity correction

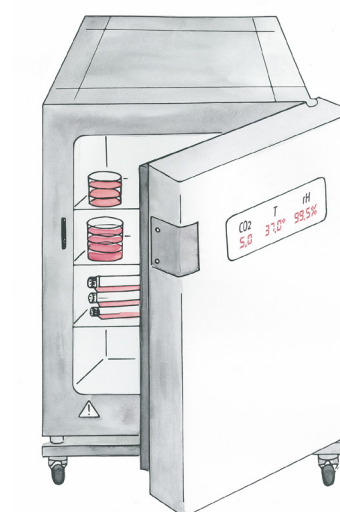

Visit us at [www.micro-hybrid.de](http://www.micro-hybrid.de) or call us at +49 36601 5920

All rights reserved. All specifications – technical included – are subject to change without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein.

## Technical specification

General	
Order number	7202.02-B.00
Measuring gas	CO <sub>2</sub>
Measurement range	0 – 20 Vol.-%
Gas supply	Diffusion
Warm up time	< 1 minute (start-up) < 15 minutes (full spec)

Measurement	
Accuracy <sup>1</sup>	± 0,2 Vol.-% ± 2 % of reading
Response time (t <sub>90</sub> )	≤ 30 s
Digital resolution	0,001 Vol.-%
Temperature dependence <sup>2</sup>	≤ ± 0,1 Vol.-%
Pressure dependence <sup>3</sup>	≤ ± 0,05 Vol.-%
Long term stability <sup>4</sup>	≤ ± 0,2 Vol.-% at 5 Vol.-% / year
Humidity correction	0 ... 200 hPa H <sub>2</sub> O

Electrical	
Supply voltage	12 – 24 V <sub>DC</sub>
Power consumption	< 2 W
Digital output	RS232, Micro-Hybrid industrial protocol
Analogue output	4 – 20 mA

Climatic conditions	
Operating temperature	0° C ... 60° C
Humidity	< 100 % relative humidity (rH), not condensing
Storage temperature	-25° C ... 85° C
Maximum temperature for heat sterilization (only sensor) <sup>5</sup>	190° C

<sup>1</sup> at 37° C, 1013 hPa, dry test gas, excludes calibration gas tolerance of ± 1 %

<sup>2</sup> with compensation at 1 Vol.% ... 20 Vol.% CO<sub>2</sub> and 20° C ... 60° C, 1013 hPa

<sup>3</sup> with compensation at 600 – 1200 hPa, 37° C and 5 Vol.-% CO<sub>2</sub>

<sup>4</sup> stability at 37° C, without heat sterilization

<sup>5</sup> maximum humidity ≤ 1 % rH, ≥ 85° C auto standby – no CO<sub>2</sub> measurement



株式会社アイ・アール・システム

<https://www.irsystem.com>

〒206-0041 東京都多摩市愛宕4-6-20

TEL: 042-400-0373 FAX: 042-400-0374 e-mail: [office@irsystem.com](mailto:office@irsystem.com)

