


MicroSENS 100-VS


IR carbon dioxide gas sensor for reliable and accurate CO₂ measurement in incubators

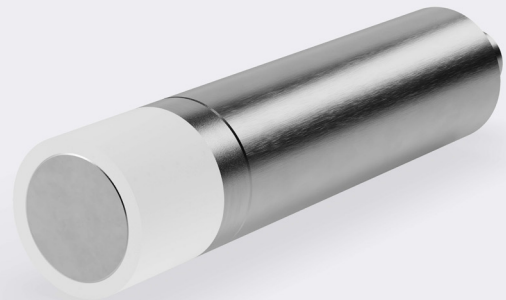

PRELIMINARY

Product benefits

- NDIR dual beam technology
- Temperature and pressure compensated
- Vapor-sterilizable up to 100° C
- Long lifetime
- Humidity correction

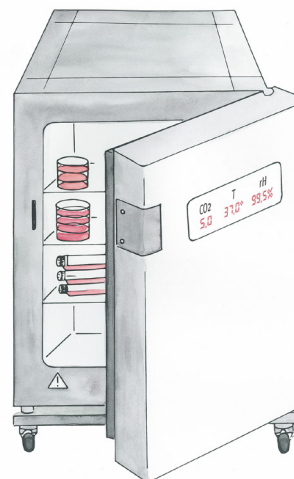

Additional product information

This IR CO₂ sensor has been specially optimized for the measurement of 5 Vol-% CO₂ in cell incubators to manage ideal cell and tissue growth.

The sensor can be placed directly in the incubation chamber to measure the exact cell experienced environment. It determines the carbon dioxide concentration based on its characteristic infrared absorption.

Online shop for IR components and sensors
Filter products simply by selecting the desired properties and request your quotation.

 microhybrid.com/shop



Technical data

Technical parameter	Unit	
General		
Order number	7208.01-B.00	
Measuring gas	CO ₂	
Measurement range	0 – 20	Vol.-%
Gas supply	Diffusion	
Warm up time	< 1 minute (start-up) < 15 minutes (full spec)	
Measurement		
Accuracy ¹	± 0.2 Vol.-% ± 2 % of reading	
Response time (t ₉₀)	≤ 45	s
Digital resolution	0.001	Vol.-%
Long term stability ⁴	≤ ± 0.25 Vol.-% at 5 Vol.-% / year	
Humidity correction	0 ... 200	hPa H ₂ O
Electrical		
Supply voltage	12 – 24	V _{DC}
Power consumption	< 2	W
Digital interface	RS485	
Digital protocol	Micro-Hybrid industrial protocol	
Analogue interface	Current 4 – 20	mA

¹ At 37 °C, 1013 hPa, dry test gas, excludes calibration gas tolerance of ± 1 %

² With compensation at 1 Vol.-% ... 20 Vol.-% CO₂ and 20 °C ... 60 °C, 1013 hPa

³ With compensation at 600 – 1200 hPa, 37 °C and 5 Vol.-% CO₂

⁴ Stability at 37 °C, without vapor sterilization

Technical data

Technical parameter		Unit
Climatic conditions		
Operating temperature	0 ... 60	°C
Humidity	< 100 % relative humidity (rH), not condensing	
Storage temperature	-25 ... 85	°C
Maximum temperature for vapor sterilization ⁵	105	°C
Pressure range ⁶	600 – 1100	hPA

⁵ Exceeding the maximum temperature may cause severe damage to the sensor.

⁶ Compensated

Disclaimer

All rights reserved. All information in this data sheet are based on latest knowledge, results of practical experience and tests carried out. Earlier specifications are hereby invalid. All specifications – technical included – are subject to change without notice. It is the customer's responsibility to ensure that the performance of the product is suitable for customer's specific application. No liability is accepted for indirect damage, in particular for the use or inability to use the product. Any liability we may have is limited to the value of the product itself.