

Automated Monitoring Solution SPTC

Thermography-based Solar Power Tower Monitoring System



System Description


The **Solar Power Tower Check (SPTC)** uses infrared technology to monitor the central absorber of a solar tower power plant. The temperature measurements are realised fully automated without the need of any manual interaction. SPTC automatically raises warnings and alarms as soon as an adjustable temperature threshold is exceeded and **transfers signals to the main system for controlling the deflection of heliostats**. This enables the heat distribution at the absorber to be monitored and optimised.

Due to the thermographic analysis of the surface of the absorber panels, any anomalies are detected at an early stage. This reduces maintenance costs and prevents cost-intensive downtimes due to overheating.

The **turnkey solution** for monitoring comes with highly reliable components in a flexible structure and thus, it is easily adaptable to the different situations and operational modes in solar power tower plants.

System Features

- Multi camera system for fully 100 % monitoring of absorber surface
- Highly detailed measurement of the panel temperature of the absorber
- Extensive conditioning of live images through automated focus tracking, size rectification and image stabilization
- Redundantly designed hardware and software for the entire system
- Main display with options for parameter setting, monitoring, operation, display, evaluation & playback with SPTC software
- Clear graphics with temperature values of the entire absorber surface, warning or alarm values in a table
- Continuous and fast transfer of all temperature and system data to the central power plant control system
- Customised system alignment and adjustment

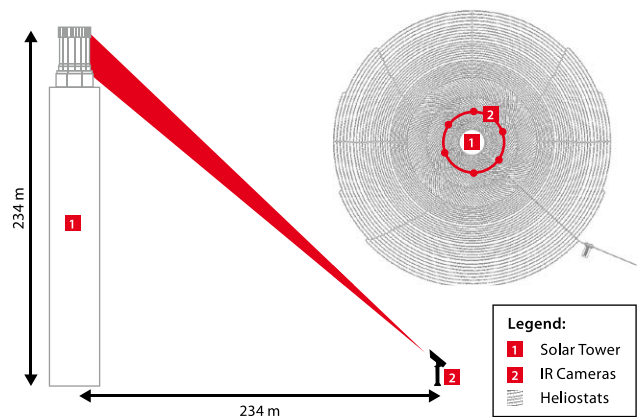

Position of IR cameras around the solar tower – measuring distance 330 m

Benefits of the SPTC System

- Automatic and complete absorber temperature monitoring on 24/7 basis
- HD thermography cameras and optimised tele lenses guarantee long-term precise and reliable temperature measurements via long distance
- Reduction of maintenance costs and downtimes
- Continuous real-time measurement and temperature analysis
- Redundant design of the complete system for safe operation
- Specialised temperature measurement algorithm and software with interface to main operator system
- Optimised system for commissioning and regular operation of CSP solar power tower plants



株式会社アイ・アール・システム

〒206-0041 東京都多摩市愛宕4-6-20

TEL: 042-400-0373 FAX: 042-400-0374 e-mail: office@irsystem.com


<https://www.irsystem.com>



Automated Monitoring Solution SPTC

Thermography-based Solar Power Tower Monitoring System

System Structure of Hardware and Software Components

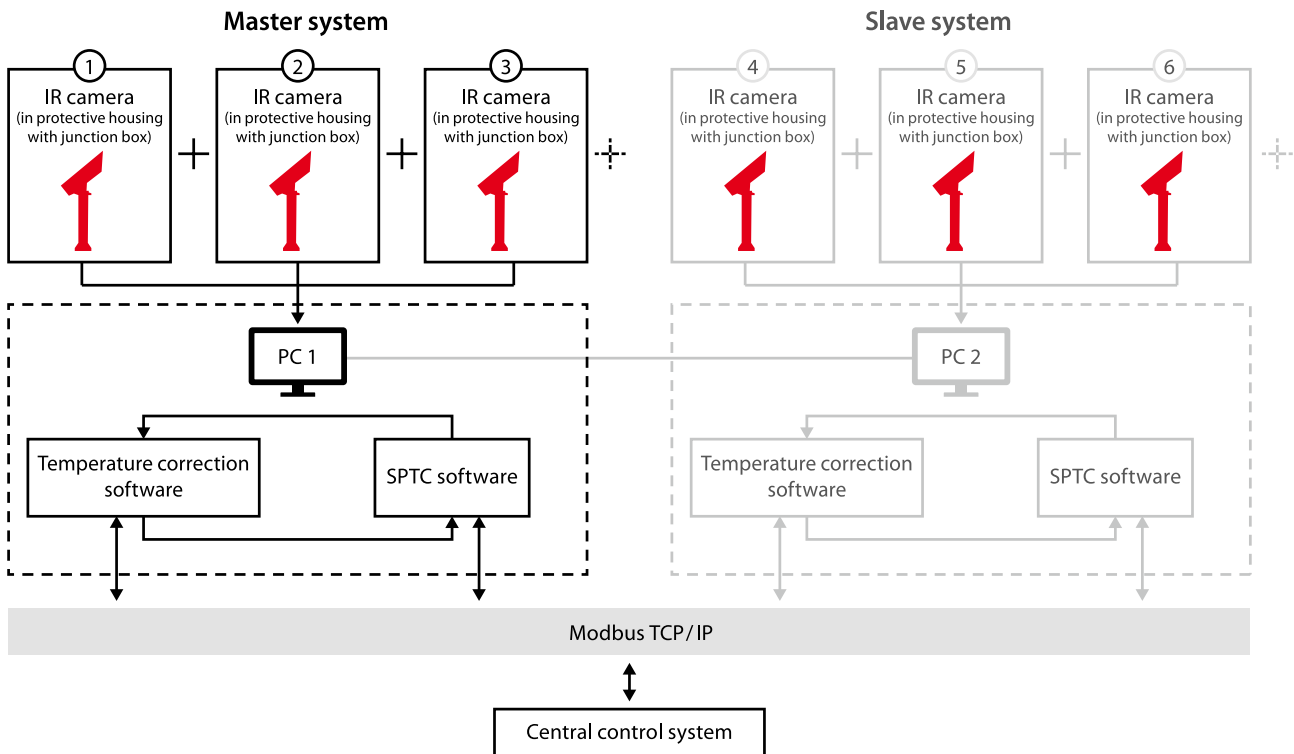


Components


- HD thermography cameras with highest resolution of (1,024 × 768) IR pixels
- Rugged 19"-industrial standard main cabinet
- Protective housing designed to withstand extreme environmental conditions
- Decentralised installable components (IR-cameras, PC, alarm unit), fiber optic cable for interference-free data transmission
- TCP/IP based flexible structure
- Highly redundant transmission adjustment based on different measurement methods
- Redundant power supply, data transmission, complete data exchange via master and slave PC
- Easy to use SPTC software allows flexible customisation




HD thermography camera with special telephoto lens

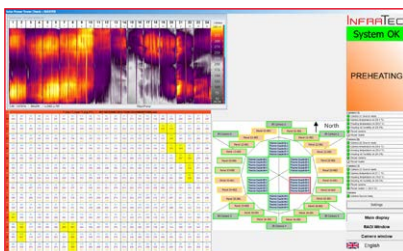

Composite thermal image of the measurement range of the absorber surface and display of the temperature values

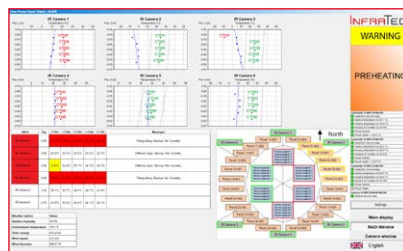

Data analysis to align the transmission and evaluate the state of the associated components

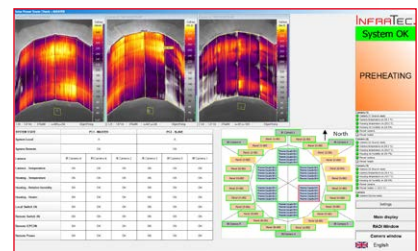

Live view of IR cameras with status overview of redundant system components