

# TOCON\_N\_steel

Miniature Housing to be used for the TOCON\_N series

## GENERAL FEATURES



### Properties of the TOCON\_N\_steel

- Optional feature for TOCON\_N detectors such as the TOCON\_NC1F-B0
- 7 – 24 V supply voltage, integrated bias generator
- Robust stainless steel M12x1 thread body, increased EMC safety
- Integrated sensor connector (Binder 4-Pin plug) with 2 m connector cable
- Not moisture-resistant. Please contact us if a water proof housing is required.
- Easy to mount and to connect.

### Features of the integrated TOCON amplified UV photodetectors

The TOCON devices are using modern hybrid technology to reduce unwanted signal disturbances caused by electromagnetic radiation. The stable 0...4.75 V output voltage can be directly connected to a SPC controller or a voltage multimeter.

## SPECIFICATIONS

Parameter	Symbol	Value	Unit
<b>Spectral Characteristics</b>		According to applied TOCON	
<b>General Characteristics (T=25°C, V<sub>supply</sub>=+7 V)</b>			
Supply Voltage	V <sub>Supply</sub>	7 ... 24	V
Max. Output Voltage (non depending on V <sub>supply</sub> )	V <sub>Out</sub>	4.75	V
Temperature Coefficient at Peak for SiC	T <sub>c</sub>	According to applied TOCON	
Temperature Coefficient at Peak for GaP	T <sub>c</sub>	According to applied TOCON	
Current Consumption	I <sub>max</sub>	According to applied TOCON	
<b>Maximum Ratings</b>			
Operating Temperature	T <sub>opt</sub>	-25 ... +85	°C
Storage Temperature	T <sub>stor</sub>	-40 ... +100	°C


# TOCON\_N\_steel

Miniature Housing with M12x1 Thread and Plug Connector

## ▶ FIELD OF VIEW

According to applied TOCON

## ▶ DRAWING

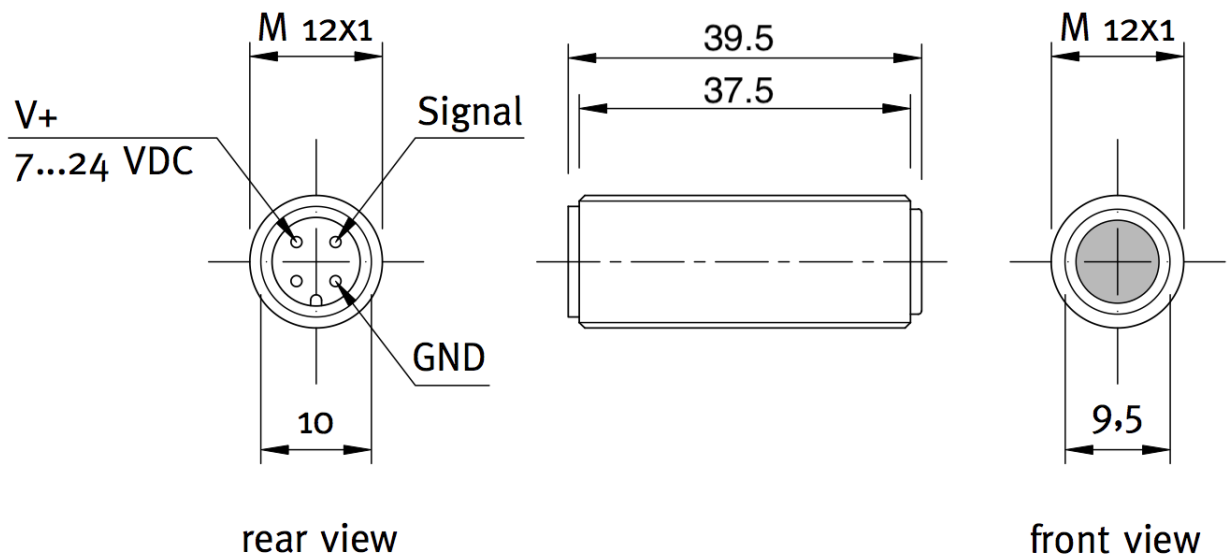

cable configuration :  
black : V+  
white : ground  
blue : signal