

### Laser Photoacoustic Spectroscopy technology (LPAS)

Multisense gas sensor technology is based on laser spectroscopy in the mid-IR using a photoacoustic sensor. It uses the mirSense proprietary Quantum Cascade Laser technology.

This combination provides a real time measurement of up to 3 gases at trace concentrations (down to sub-ppm) in an unprecedented compact format (less than 1 liter), within a robust and easy to maintain module.

Multisense was developed and designed for integrators, gas system manufacturers, gas analyser manufacturers...

#### Applications:

The multiSense monitors the air quality for:


- Confined area quality control
- Livestock/soils emissions
- Water treatment plant

### Technical Features

### User Benefits

Trace analysis (down to ppb) High precision (< 1 %)	Process optimization
Response time in seconds	Real time monitoring
Multiple lasers	Multigas sensor
Low cell volume (1 ml)	Low extraction flow (<80 ml / min) Reduced pumping, reduced environmental impact
No moving parts, no optics	Compact and robust sensor for industrial use
Bloc conception	Easy integration, operation, maintenance
Proprietary software (self-diagnostic, alarms)	Plug and play, user friendly interface, high reliability
Miniaturized components, no consumables	Cost effective analyser (low CAPEX and OPEX), fast return on investment

# TECHNICAL DATA



Gases	Range*	Detection limit**	Precision***
H <sub>2</sub> O	100 to 70 000 ppm	< 100 ppm	<1%
CO	0.1 to 100 ppm	< 0.1 ppm	<1%
CO <sub>2</sub>	1 to 4 000 ppm	< 1 ppm	<1%
NH <sub>3</sub>	0.1 to 500 ppm	< 0.1 ppm	<1%
CH <sub>4</sub>	0.4 to 500 ppm	< 0.4 ppm	<1%
N <sub>2</sub> O	0.15 to 100 ppm	< 0.15 ppm	<1%
C <sub>6</sub> H <sub>6</sub>	0.05 to 100 ppm	< 0.05 ppm	<1%

\*Indicative values, other ranges on request  
\*\* 3 σ, 60 s integration time  
\*\*\* % of the measured value or LOD  
Other gases on request

## ANALYTICAL

**Measurement range:** typ. > 4 decades, calibres from LOD to max. range


**Limit of detection:** sub-ppm (depends on gas, matrix, application)

**Repeatability:** <1% of the read value or LOD

**Accuracy:** < 1 % of the read value or LOD

**Response time T90:** typ. few seconds (depend on LOD specification)

**Max. measurement rate:** 10 Hz

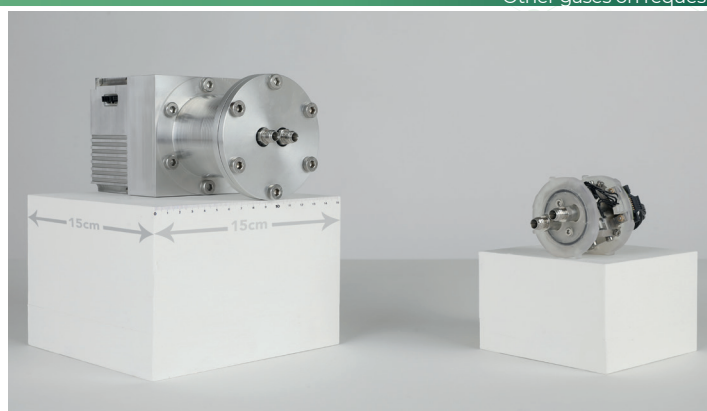

## SAMPLING

**Gas consumption:** < 80 ml/min

**Gas cell volume:** 1 ml

**Sample temperature:** Moisture below ambient temperature saturation

**Operating pressure:** [0.5 - 2] bar.a\*

\* Pressure sensor required

## ELECTRIC & COMMUNICATION

**Interface:** RS485

**Protocol:** modbus RTU

**Power:** ~10W, 24V DC

## MECHANICAL

**Size:** 115x170x108 mm

**Weight:** <2 kg

**Gas connectors:** 1/8" O.D. Swagelok

## ENVIRONMENT

**Operating temperature\*:** typ. 10 to 30°C

**Humidity:** 0 – 95 %, non condensing

\* See documentation for guidelines



株式会社アイ・アール・システム

〒206-0041 東京都多摩市愛宕4-6-20

TEL: 042-400-0373 FAX: 042-400-0374 e-mail: [office@irsystem.com](mailto:office@irsystem.com)

<https://www.irsystem.com>

